



TECHNICAL BROCHURE

B33-80GS

FEATURES

Powered for Continuous Operation: All ratings are within the working limits of the motor as recommended by the motor manufacturer. Pump can be operated continuously without damage to the motor.

Field Serviceable: Units have left hand threads and are field serviceable with common tools and readily available repair parts.

Sand Handling Design: Our face clearance, floating impeller stack has proven itself for over 40 years as a superior sand handling, durable pump design.

FDA Compliant Non-Metallic Parts: Impellers, diffusers and bearing spiders are constructed of glass filled engineered composites. They are corrosion resistant and non-toxic.

Discharge Head/Check Valve: Cast 303 stainless steel for strength and durability. Two cast-in safety line loops for installer convenience. The built-in check valve is constructed of stainless steel and FDA compliant BUNA rubber for abrasion resistance and quiet operation.

Motor Adapter: Cast 303 stainless steel for rigid, accurate alignment of pump and motor. Easy access to motor mounting nuts using standard open end wrench.

Stainless Steel Casing: Polished stainless steel is strong and corrosion resistant.

Hex Shaft Design: Six sided shafts for positive impeller drive.

Engineered Polymer Bearings: The proprietary, engineered polymer bearing material is strong and resistant to abrasion and wear. The upper bearing is mounted in a durable engineered composite bearing spider for excellent abrasion resistance.

33GS, 40GS, 55GS, 60GS, 75GS & 80GS

33-80 GPM, 1 - 10 HP, 60 HZ, SUBMERSIBLE PUMPS

WATER END DATA

| Series | Model | Required H.P. | Stages | Water End | |
|--------|---------|---------------|--------|-------------|----------|
| | | | | Length (in) | Wt (lbs) |
| 33GS | 33GS10 | 1 | 6 | 14.2 | 8 |
| | 33GS15 | 1.5 | 8 | 16.6 | 9 |
| | 33GS20 | 2 | 10 | 19.1 | 10 |
| | 33GS30 | 3 | 14 | 24 | 13 |
| | 33GS50 | 5 | 22 | 35.2 | 19 |
| | 33GS75 | 7.5 | 34 | 50.6 | 27 |
| | 33GS100 | 10 | 44 | 62.8 | 33 |
| 40GS | 40GS15 | 1.5 | 5 | 12.9 | 8 |
| | 40GS20 | 2 | 6 | 14.2 | 8 |
| | 40GS30 | 3 | 8 | 16.6 | 9 |
| | 40GS50 | 5 | 14 | 24.0 | 13 |
| | 40GS75 | 7.5 | 21 | 34.0 | 18 |
| 55GS | 55GS15 | 1.5 | 5 | 17.1 | 10 |
| | 55GS20 | 2 | 7 | 21.2 | 12 |
| | 55GS30 | 3 | 9 | 25.3 | 15 |
| | 55GS50 | 5 | 15 | 39.1 | 22 |
| | 55GS75 | 7.5 | 22 | 54.1 | 32 |
| | 55GS100 | 10 | 29 | 98.4 | 39 |
| 60GS | 60GS15 | 1.5 | 4 | 15.0 | 8 |
| | 60GS20 | 2 | 5 | 17.1 | 9 |
| | 60GS30 | 3 | 7 | 21.2 | 10 |
| | 60GS50 | 5 | 11 | 30.9 | 14 |
| | 60GS75 | 7.5 | 17 | 43.2 | 19 |
| 75GS | 75GS30 | 3 | 7 | 24.1 | 14 |
| | 75GS50 | 5 | 11 | 34.8 | 19 |
| | 75GS75 | 7.5 | 16 | 48.2 | 27 |
| | 75GS100 | 10 | 21 | 63.8 | 35 |
| 80GS | 80GS30 | 3 | 5 | 21.4 | 10 |
| | 80GS50 | 5 | 9 | 29.4 | 13 |
| | 80GS75 | 7.5 | 14 | 42.8 | 24 |

SPECIFICATIONS

| Model | Flow Range GPM | Horsepower Range | Best Efficiency GPM | Discharge Connection | Minimum Well Size | Rotation [Ⓛ] |
|-------|----------------|------------------|---------------------|----------------------|-------------------|-----------------------|
| 33GS | 10 – 50 | 1 – 10 | 33 | 2" | 4" | CCW |
| 40GS | 20 – 65 | 1½ – 7½ | 40 | 2" | 4" | CCW |
| 55GS | 20 – 80 | 1½ – 10 | 55 | 2" | 4" | CCW |
| 60GS | 40 – 80 | 1½ – 7½ | 60 | 2" | 4" | CCW |
| 75GS | 40 – 100 | 3 – 10 | 75 | 2" | 4" | CCW |
| 80GS | 50 – 120 | 3 – 7½ | 80 | 2" | 4" | CCW |



Ⓛ Rotation is counterclockwise when observed from pump discharge end.

"GS" SERIES MATERIALS OF CONSTRUCTION

| Part Name | Material |
|------------------------------|---------------------------------------|
| Discharge Head | AISI 303 SS |
| Check Valve Poppet | AISI 304 SS |
| Check Valve Seal | BUNA, FDA compliant |
| Check Valve Seat | AISI 304 SS |
| Check Valve Retaining Ring | AISI 302 SS |
| Bearing Spider – Upper | Glass Filled Engineered Composite |
| Bearing | Proprietary Engineered Polymer |
| Klipring | AISI 301 SS |
| Diffuser | Lexan [®] |
| Impeller | Noryl [®] |
| Bowl | AISI 304 SS |
| Intermediate Sleeve* | AISI 304 SS, Powder Metal |
| Intermediate Shaft Coupling* | AISI 304 SS, Powder Metal |
| Intermediate Bearing Spider* | Glass Filled Engineered Composite |
| Intermediate Bearing Spider* | AISI 303 SS |
| Shim | AISI 304 SS |
| Screws – Cable Guard | AISI 304 SS |
| Motor Adapter | AISI 303 SS |
| Casing | AISI 304 SS |
| Shaft | AISI 304 SS, 1-3 HP; 17/4 PH, 5-10 HP |
| Coupling | AISI 304 SS, Powder Metal |
| Cable Guard | AISI 304 SS |
| Suction Screen | AISI 304 SS |

*See repair parts for where used.

NOMENCLATURE – SOLD AS WATER ENDS ONLY

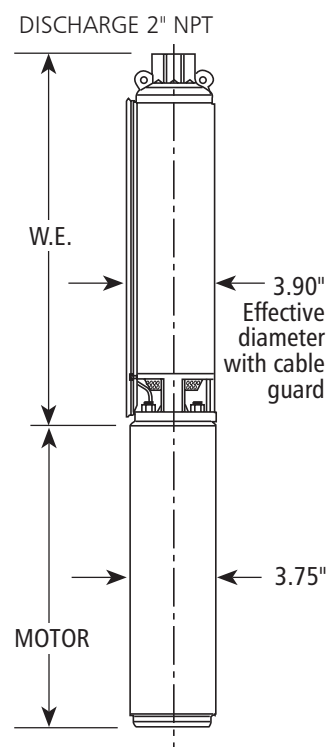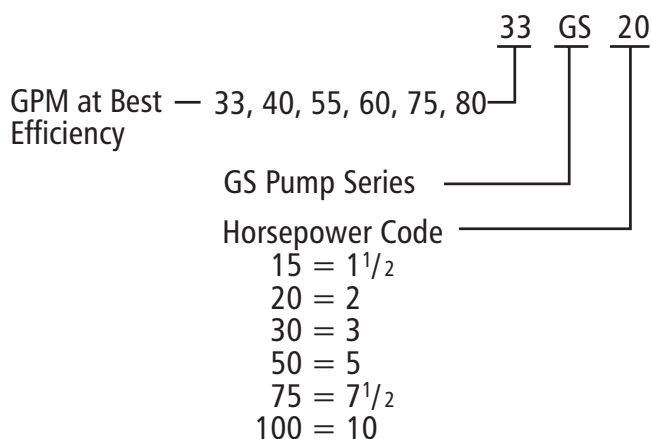

CENTRIPRO 4" SINGLE-PHASE MOTORS

| Order No. | Type | HP | Volts | Length in. (mm) | Weight lb. (kg.) |
|-----------|---------------|-----|-------|-----------------|------------------|
| M10422 | 2-wire PSC | 1 | 230 | 13.3 (337) | 24.5 (11.1) |
| M15422 | | 1.5 | | 14.9 (378) | 28.9 (13.1) |
| M10412 | 3-wire | 1 | 230 | 11.7 (297) | 23.1 (10.5) |
| M15412 | | 1.5 | | 13.6 (345) | 27.4 (12.4) |
| M20412 | | 2 | | 15.1 (383) | 31.0 (14.1) |
| M30412 | | 3 | | 18.3 (466) | 40.0 (18.1) |
| M50412 | | 5 | | 27.7 (703) | 70.0 (31.8) |

CENTRIPRO 4" THREE-PHASE MOTORS

| Order No. | HP | Volts | Length in. (mm) | Weight lb. (kg.) |
|-----------|-----|-------|-----------------|------------------|
| M10430 | 1 | 200 | 11.7 (297) | 22 (10.4) |
| M15430 | 1.5 | | 11.7 (297) | 22 (10.4) |
| M20430 | 2 | | 13.8 (351) | 28 (12.7) |
| M30430 | 3 | | 15.3 (389) | 32 (14.5) |
| M50430 | 5 | | 21.7 (550) | 55 (24.9) |
| M75430 | 7.5 | | 27.7 (703) | 70 (31.8) |
| M10432 | 1 | 230 | 11.7 (297) | 23 (10.4) |
| M15432 | 1.5 | | 11.7 (297) | 23 (10.4) |
| M20432 | 2 | | 13.8 (351) | 28 (12.7) |
| M30432 | 3 | | 15.3 (389) | 32 (14.5) |
| M50432 | 5 | | 21.7 (550) | 55 (24.9) |
| M75432 | 7.5 | | 27.7 (703) | 70 (31.8) |
| M10434 | 1 | 460 | 11.7 (297) | 23 (10.4) |
| M15434 | 1.5 | | 11.7 (297) | 23 (10.4) |
| M20434 | 2 | | 13.8 (351) | 28 (12.7) |
| M30434 | 3 | | 15.3 (389) | 32 (14.5) |
| M50434 | 5 | | 21.7 (550) | 55 (24.9) |
| M75434 | 7.5 | | 27.7 (703) | 70 (31.8) |
| M100434 | 10 | | — | — |
| M15434 | 1.5 | 575 | 11.7 (297) | 23 (10.4) |
| M20434 | 2 | | 15.3 (389) | 32 (14.5) |
| M30434 | 3 | | 15.3 (389) | 32 (14.5) |
| M50434 | 5 | | 27.7 (703) | 70 (31.8) |
| M75434 | 7.5 | | 27.7 (703) | 70 (31.8) |

NEMA MOTOR

- Corrosion resistant stainless steel construction.
- Built-in surge arrestor is provided on single phase motors through 5 HP.
- Stainless steel splined shaft.
- Hermetically sealed windings.
- Replaceable motor lead assembly.
- NEMA mounting dimensions.
- Control box is required with 3 wire single phase units.
- Three phase units require a magnetic starter with three leg Class 10 overload protection.

AGENCY LISTINGS



Pump / Water End and Complete Pump - tested to UL778 and CAN 22.2 by UL (Underwriters Laboratories Inc.)



CentriPro Motor - tested to UL778 and CAN 22.2 by CSA International (Canadian Standards Association)



Pump/Water End - Certified to NSF/ANSI 61 – Drinking Water System Components 4P49




CentriPro Motor - Certified to NSF/ANSI 61, Annex G, Drinking Water System Components 4P49




NSF/ANSI 372 – Drinking Water System Components – Lead Content

CLASS 6853 01 - Low Lead Content Certification Program - - Plumbing Products

Model 33GS

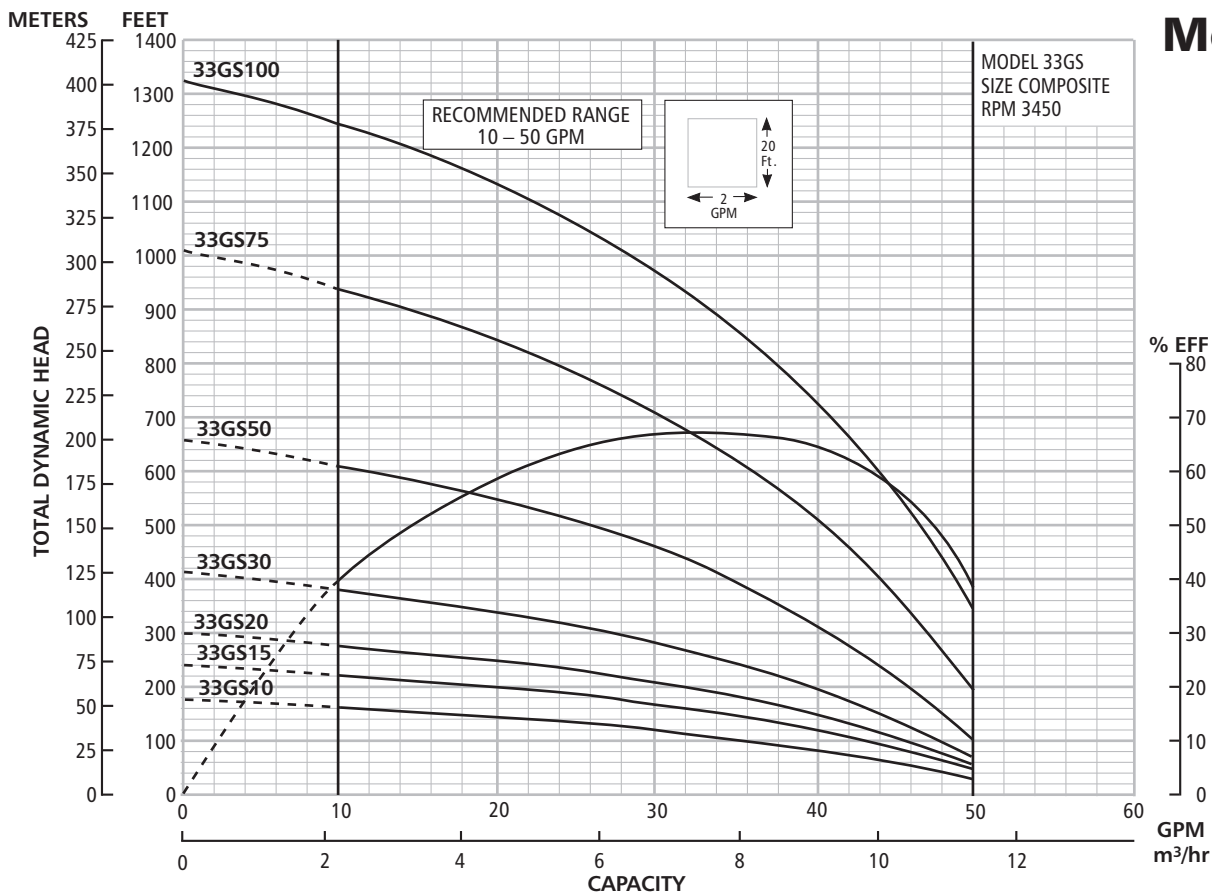

Model 40GS

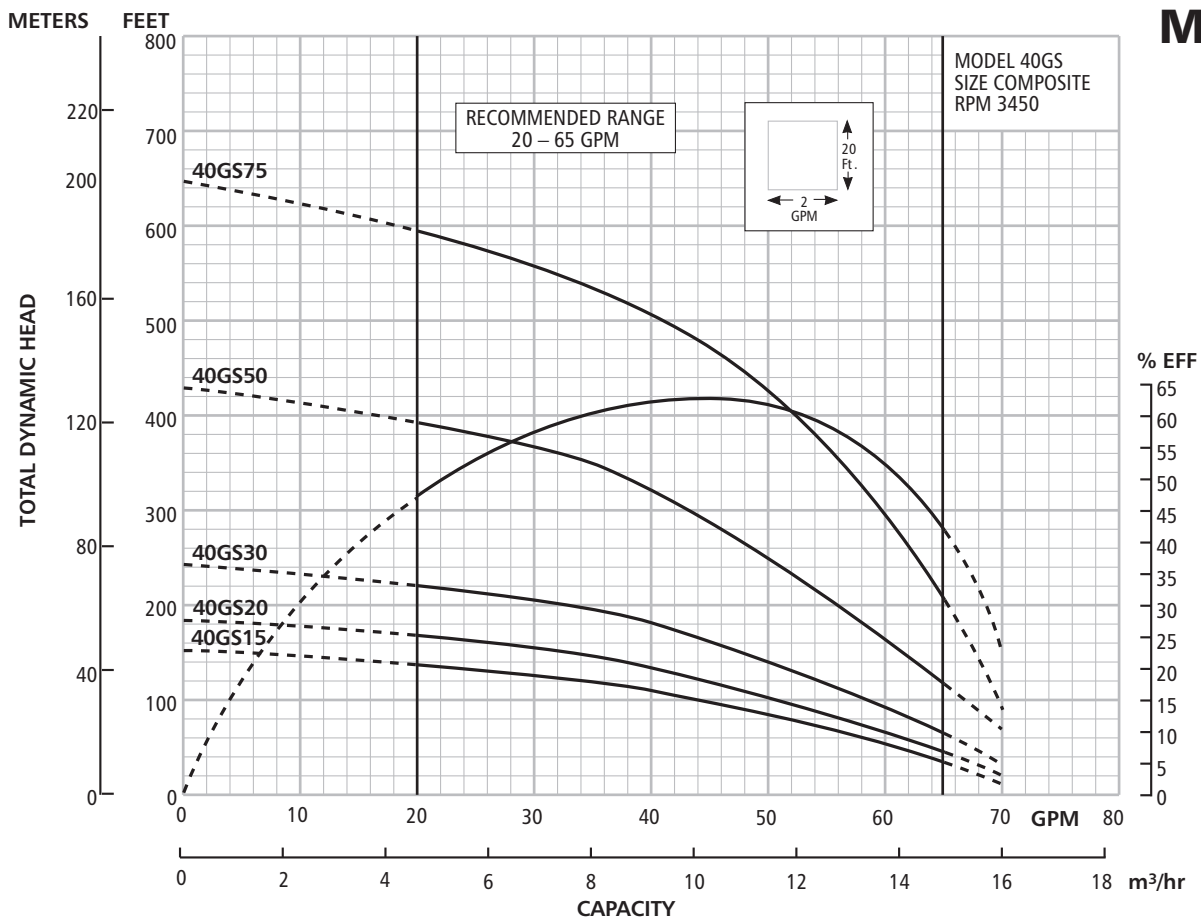

Residential Water Systems

MODEL 33GS

SELECTION CHART

Horsepower Range 1 – 3, Recommended Range 10 – 50 GPM, 60 Hz, 3450 RPM

| Pump Model | HP | PSI | Depth to Water in Feet/Ratings in GPM (Gallons per Minute) | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------|----|-----|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | | 20 | 40 | 60 | 80 | 100 | 120 | 140 | 160 | 180 | 200 | 220 | 240 | 260 | 280 | 300 | 320 | 340 | 360 | 380 | 400 | 420 | 440 | 460 | 480 | 520 | 560 | 600 |
| 33GS10 | 1 | 0 | | 48 | 45 | 41 | 36 | 30 | 22 | 11 | | | | | | | | | | | | | | | | | | | |
| | | 20 | 44 | 39 | 34 | 28 | 19 | | | | | | | | | | | | | | | | | | | | | | |
| | | 30 | 39 | 33 | 27 | 17 | | | | | | | | | | | | | | | | | | | | | | | |
| | | 40 | 32 | 25 | 15 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50 | 24 | 14 | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | 12 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 67 | 58 | 50 | 41 | 32 | 24 | 15 | 6 | | | | | | | | | | | | | | | | | | | |
| 33GS15 | 1½ | 0 | | 50 | 48 | 46 | 43 | 40 | 37 | 32 | 26 | 19 | | | | | | | | | | | | | | | | | |
| | | 20 | 48 | 45 | 43 | 39 | 35 | 31 | 24 | 17 | | | | | | | | | | | | | | | | | | | |
| | | 30 | 45 | 42 | 39 | 35 | 30 | 23 | 15 | | | | | | | | | | | | | | | | | | | | |
| | | 40 | 42 | 38 | 34 | 29 | 22 | 14 | | | | | | | | | | | | | | | | | | | | | |
| | | 50 | 38 | 33 | 28 | 21 | 12 | | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | 33 | 27 | 20 | 11 | | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 95 | 86 | 78 | 69 | 60 | 52 | 43 | 34 | 26 | 17 | | | | | | | | | | | | | | | | | |
| 33GS20 | 2 | 0 | | 49 | 48 | 46 | 44 | 41 | 38 | 35 | 32 | 28 | 22 | | | | | | | | | | | | | | | | |
| | | 20 | 49 | 47 | 45 | 43 | 40 | 38 | 34 | 31 | 26 | 21 | 14 | | | | | | | | | | | | | | | | |
| | | 30 | 47 | 45 | 42 | 40 | 37 | 34 | 30 | 25 | 20 | 13 | | | | | | | | | | | | | | | | | |
| | | 40 | 44 | 42 | 40 | 37 | 33 | 29 | 24 | 19 | 11 | | | | | | | | | | | | | | | | | | |
| | | 50 | 42 | 39 | 36 | 33 | 29 | 24 | 18 | | | | | | | | | | | | | | | | | | | | |
| | | 60 | 39 | 36 | 32 | 28 | 23 | 16 | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 121 | 112 | 103 | 95 | 86 | 77 | 69 | 60 | 51 | 43 | 34 | 26 | | | | | | | | | | | | | | | |
| 33GS30 | 3 | 0 | | 49 | 48 | 46 | 44 | 41 | 38 | 35 | 32 | 28 | 22 | | | | | | | | | | | | | | | | |
| | | 20 | 50 | 49 | 47 | 46 | 44 | 43 | 41 | 39 | 37 | 35 | 32 | 30 | 27 | 23 | 19 | 13 | | | | | | | | | | | |
| | | 30 | 49 | 47 | 46 | 44 | 42 | 41 | 39 | 37 | 34 | 32 | 29 | 26 | 22 | 18 | 12 | | | | | | | | | | | | |
| | | 40 | 47 | 45 | 44 | 42 | 40 | 38 | 36 | 34 | 32 | 29 | 25 | 22 | 17 | 11 | | | | | | | | | | | | | |
| | | 50 | 45 | 44 | 42 | 40 | 38 | 36 | 34 | 31 | 28 | 25 | 21 | 16 | | | | | | | | | | | | | | | |
| | | 60 | 43 | 42 | 40 | 38 | 36 | 33 | 31 | 28 | 24 | 20 | 15 | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 170 | 161 | 152 | 144 | 135 | 126 | 118 | 109 | 100 | 92 | 83 | 74 | 66 | 57 | 48 | 40 | 31 | 23 | | | | | | | | | |

Horsepower Range 5-10, Recommended Range 10 – 50 GPM, 60 Hz, 3450 RPM

| Pump Model | HP | PSI | Depth to Water in Feet/Ratings in GPM (Gallons per Minute) | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------|----|-----|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|------|------|------|------|------|------|
| | | | 50 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 650 | 700 | 750 | 800 | 850 | 900 | 950 | 1000 | 1050 | 1100 | 1150 | 1200 | 1250 | 1300 |
| 33GS50 | 5 | 0 | | 50 | 48 | 46 | 44 | 41 | 38 | 35 | 31 | 27 | 20 | 11 | | | | | | | | | | | | | | |
| | | 20 | 50 | 48 | 46 | 44 | 41 | 38 | 35 | 32 | 27 | 21 | 11 | | | | | | | | | | | | | | | |
| | | 30 | 49 | 47 | 45 | 43 | 40 | 37 | 34 | 30 | 25 | 17 | | | | | | | | | | | | | | | | |
| | | 40 | 48 | 46 | 44 | 41 | 39 | 36 | 32 | 27 | 21 | 12 | | | | | | | | | | | | | | | | |
| | | 50 | 47 | 45 | 43 | 40 | 37 | 34 | 30 | 25 | 18 | | | | | | | | | | | | | | | | | |
| | | 60 | 46 | 44 | 42 | 39 | 36 | 32 | 28 | 22 | 13 | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 264 | 242 | 220 | 199 | 177 | 156 | 134 | 112 | 91 | 69 | 47 | 26 | | | | | | | | | | | | | | |
| 33GS75 | 7½ | 0 | | 50 | 49 | 47 | 46 | 44 | 42 | 40 | 38 | 36 | 33 | 31 | 27 | 23 | 19 | 14 | | | | | | | | | | |
| | | 20 | | 50 | 49 | 47 | 46 | 44 | 42 | 41 | 38 | 36 | 34 | 31 | 28 | 24 | 19 | 14 | | | | | | | | | | |
| | | 30 | | 50 | 49 | 48 | 46 | 45 | 43 | 42 | 40 | 37 | 35 | 32 | 29 | 26 | 22 | 17 | 12 | | | | | | | | | |
| | | 40 | | 50 | 49 | 47 | 46 | 44 | 43 | 41 | 39 | 36 | 34 | 31 | 28 | 24 | 20 | 15 | | | | | | | | | | |
| | | 50 | | 49 | 48 | 47 | 45 | 43 | 42 | 40 | 38 | 35 | 33 | 30 | 26 | 22 | 17 | 12 | | | | | | | | | | |
| | | 60 | 50 | 49 | 47 | 46 | 44 | 43 | 41 | 39 | 37 | 34 | 31 | 28 | 24 | 20 | 15 | | | | | | | | | | | |
| Shut-off PSI | | | 415 | 393 | 371 | 350 | 328 | 306 | 285 | 263 | 241 | 220 | 198 | 176 | 155 | 133 | 111 | 90 | 68 | 47 | | | | | | | | |
| 33GS100 | 10 | 0 | | 50 | 48 | 46 | 44 | 41 | 38 | 35 | 31 | 27 | 20 | 11 | | | | | | | | | | | | | | |
| | | 20 | | 50 | 49 | 47 | 46 | 44 | 42 | 41 | 38 | 36 | 34 | 31 | 28 | 24 | 19 | 14 | | | | | | | | | | |
| | | 30 | | 50 | 49 | 48 | 46 | 45 | 43 | 42 | 40 | 37 | 35 | 32 | 29 | 26 | 22 | 17 | 12 | | | | | | | | | |
| | | 40 | | 50 | 49 | 47 | 46 | 44 | 43 | 41 | 39 | 36 | 34 | 31 | 28 | 24 | 20 | 15 | | | | | | | | | | |
| | | 50 | | 49 | 48 | 47 | 45 | 43 | 42 | 40 | 38 | 35 | 33 | 30 | 26 | 22 | 17 | 12 | | | | | | | | | | |
| | | 60 | | 49 | 47 | 46 | 44 | 43 | 41 | 39 | 37 | 34 | 31 | 28 | 24 | 20 | 15 | | | | | | | | | | | |
| Shut-off PSI | | | 551 | 529 | 508 | 486 | 464 | 443 | 421 | 399 | 378 | 356 | 334 | 313 | 291 | 269 | 248 | 226 | 205 | 183 | 161 | 140 | 118 | 96 | 75 | 53 | | |

MODEL 40GS

SELECTION CHART

Horsepower Range 1½ – 7½, Recommended Range 20 – 65 GPM, 60 Hz, 3450 RPM

| Pump Model | HP | PSI | Depth to Water in Feet/Ratings in GPM (Gallons per Minute) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------|----|-----|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|--|--|--|--|
| | | | 20 | 40 | 60 | 80 | 100 | 120 | 140 | 160 | 180 | 200 | 220 | 240 | 260 | 280 | 300 | 320 | 340 | 360 | 380 | 400 | 440 | 480 | 520 | 560 | 600 | 640 | | | | | |
| 40GS15 | 1½ | 0 | | 65 | 59 | 53 | 46 | 35 | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 20 | 58 | 51 | 43 | 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 30 | 50 | 41 | 28 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 40 | 40 | 25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50 | 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 57 | 49 | 40 | 31 | 23 | 14 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40GS20 | 2 | 0 | | | 63 | 58 | 53 | 47 | 38 | 25 | | | | | | | | | | | | | | | | | | | | | | | |
| | | 20 | 61 | 57 | 51 | 44 | 35 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 30 | 56 | 50 | 43 | 33 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 40 | 49 | 42 | 31 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50 | 40 | 29 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | 26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 71 | 62 | 53 | 45 | 36 | 27 | 19 | 10 | | | | | | | | | | | | | | | | | | | | | | | |
| 40GS30 | 3 | 0 | | | | 63 | 59 | 56 | 51 | 47 | 41 | 33 | 20 | | | | | | | | | | | | | | | | | | | | |
| | | 20 | 65 | 62 | 58 | 54 | 50 | 45 | 38 | 32 | 30 | | | | | | | | | | | | | | | | | | | | | | |
| | | 30 | 61 | 58 | 54 | 49 | 44 | 37 | 28 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 40 | 57 | 53 | 48 | 43 | 36 | 26 | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50 | 52 | 48 | 42 | 35 | 24 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | 47 | 41 | 33 | 21 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 97 | 88 | 80 | 71 | 62 | 54 | 45 | 36 | 28 | 19 | 10 | | | | | | | | | | | | | | | | | | | | |
| 40GS50 | 5 | 0 | | | | | | 65 | 64 | 62 | 60 | 58 | 56 | 53 | 51 | 48 | 45 | 42 | 38 | 33 | 26 | | | | | | | | | | | | |
| | | 20 | | | | 65 | 63 | 61 | 59 | 57 | 55 | 52 | 50 | 47 | 44 | 41 | 36 | 31 | 23 | | | | | | | | | | | | | | |
| | | 30 | | | 64 | 63 | 61 | 59 | 57 | 54 | 52 | 50 | 47 | 44 | 40 | 36 | 30 | 21 | | | | | | | | | | | | | | | |
| | | 40 | | 64 | 62 | 60 | 58 | 56 | 54 | 52 | 49 | 46 | 43 | 39 | 35 | 29 | 20 | | | | | | | | | | | | | | | | |
| | | 50 | 64 | 62 | 60 | 58 | 56 | 54 | 51 | 49 | 46 | 43 | 39 | 34 | 28 | | | | | | | | | | | | | | | | | | |
| | | 60 | 62 | 60 | 58 | 56 | 53 | 51 | 48 | 45 | 42 | 38 | 33 | 26 | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 178 | 169 | 161 | 152 | 143 | 135 | 126 | 117 | 109 | 100 | 91 | 83 | 74 | 65 | 57 | 48 | 39 | 31 | 22 | | | | | | | | | | | | |
| 40GS75 | 7½ | 0 | | | | | | | | | | 65 | 64 | 63 | 62 | 61 | 60 | 59 | 57 | 56 | 54 | 53 | 49 | 44 | 38 | 30 | | | | | | | |
| | | 20 | | | | | | | | | | 65 | 64 | 63 | 62 | 61 | 59 | 58 | 57 | 55 | 54 | 52 | 50 | 48 | 43 | 37 | 28 | | | | | | |
| | | 30 | | | | | | | | | | 65 | 64 | 63 | 62 | 61 | 59 | 58 | 57 | 55 | 53 | 52 | 50 | 48 | 45 | 40 | 32 | 22 | | | | | |
| | | 40 | | | | | | | | | | 65 | 64 | 63 | 62 | 60 | 59 | 58 | 56 | 55 | 53 | 51 | 49 | 47 | 45 | 42 | 36 | 27 | | | | | |
| | | 50 | | | | | | | | | | 65 | 64 | 62 | 61 | 60 | 59 | 58 | 56 | 55 | 53 | 51 | 50 | 47 | 45 | 42 | 39 | 31 | 20 | | | | |
| | | 60 | | | 65 | 64 | 63 | 62 | 61 | 60 | 59 | 57 | 56 | 54 | 53 | 51 | 49 | 47 | 44 | 41 | 38 | 35 | 25 | | | | | | | | | | |
| Shut-off PSI | | | 271 | 263 | 254 | 245 | 237 | 228 | 219 | 211 | 202 | 194 | 185 | 176 | 168 | 159 | 150 | 142 | 133 | 124 | 116 | 107 | 90 | 72 | 55 | 38 | | | | | | | |

Residential Water Systems

MODEL 55GS

SELECTION CHART


Horsepower Range 1½ – 5, Recommended Range 20 – 80 GPM, 60 Hz, 3450 RPM

| Pump Model | HP | PSI | Depth to Water in Feet/Ratings in GPM (Gallons per Minute) | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------|----|-----|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|
| | | | 20 | 40 | 60 | 80 | 100 | 120 | 140 | 160 | 180 | 200 | 220 | 240 | 260 | 280 | 300 | 320 | 340 | 360 | 380 | 400 | 420 | 440 | 460 | 480 | 500 | |
| 55GS15 | 1½ | 0 | 78 | 71 | 64 | 54 | 42 | 24 | | | | | | | | | | | | | | | | | | | | |
| | | 20 | 61 | 51 | 37 | | | | | | | | | | | | | | | | | | | | | | | |
| | | 30 | 49 | 35 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 40 | 32 | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 52 | 43 | 35 | 26 | 17 | 9 | | | | | | | | | | | | | | | | | | | | |
| 55GS20 | 2 | 0 | | 76 | 71 | 65 | 58 | 50 | 41 | 28 | | | | | | | | | | | | | | | | | | |
| | | 20 | 69 | 63 | 56 | 48 | 37 | 24 | | | | | | | | | | | | | | | | | | | | |
| | | 30 | 62 | 55 | 46 | 35 | 21 | | | | | | | | | | | | | | | | | | | | | |
| | | 40 | 54 | 45 | 34 | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50 | 43 | 32 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | 29 | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 76 | 67 | 58 | 50 | 41 | 32 | 24 | 15 | | | | | | | | | | | | | | | | | | |
| 55GS30 | 3 | 0 | | 80 | 76 | 72 | 68 | 63 | 58 | 52 | 44 | 35 | | | | | | | | | | | | | | | | |
| | | 20 | 75 | 71 | 67 | 62 | 56 | 49 | 42 | 32 | | | | | | | | | | | | | | | | | | |
| | | 30 | 70 | 66 | 61 | 55 | 48 | 40 | 30 | | | | | | | | | | | | | | | | | | | |
| | | 40 | 65 | 60 | 54 | 47 | 39 | 28 | | | | | | | | | | | | | | | | | | | | |
| | | 50 | 59 | 53 | 46 | 37 | 26 | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | 52 | 45 | 36 | 25 | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 102 | 94 | 85 | 76 | 68 | 59 | 50 | 42 | 33 | 24 | | | | | | | | | | | | | | | | |
| 55GS50 | 5 | 0 | | | 80 | 78 | 76 | 73 | 71 | 68 | 65 | 62 | 58 | 55 | 50 | 46 | 40 | 34 | 27 | | | | | | | | | |
| | | 20 | | 80 | 77 | 75 | 73 | 70 | 67 | 64 | 61 | 57 | 53 | 49 | 44 | 39 | 32 | 25 | | | | | | | | | | |
| | | 30 | 79 | 77 | 75 | 72 | 70 | 67 | 64 | 60 | 57 | 53 | 48 | 43 | 38 | 31 | 24 | | | | | | | | | | | |
| | | 40 | 77 | 74 | 72 | 69 | 66 | 63 | 60 | 56 | 52 | 47 | 42 | 37 | 30 | 23 | | | | | | | | | | | | |
| | | 50 | 74 | 71 | 69 | 66 | 63 | 59 | 55 | 51 | 47 | 42 | 36 | 29 | 22 | | | | | | | | | | | | | |
| | | 60 | 71 | 68 | 65 | 62 | 59 | 55 | 51 | 46 | 41 | 35 | 28 | 20 | | | | | | | | | | | | | | |
| Shut-off PSI | | | 178 | 169 | 161 | 152 | 143 | 135 | 126 | 117 | 109 | 100 | 91 | 83 | 74 | 65 | 57 | 48 | 39 | 31 | | | | | | | | |


Horsepower Range 7½ – 10, Recommended Range 20 – 80 GPM, 60 Hz, 3450 RPM

| Pump Model | HP | PSI | Depth to Water in Feet/Ratings in GPM (Gallons per Minute) | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------|----|-----|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | | 20 | 60 | 100 | 140 | 180 | 220 | 260 | 300 | 340 | 380 | 420 | 460 | 500 | 540 | 580 | 620 | 660 | 700 | 740 | 780 | 820 | 860 | 900 | 940 | 980 |
| 55GS75 | 7½ | 0 | | | 79 | 76 | 73 | 70 | 66 | 62 | 58 | 52 | 46 | 39 | 31 | 22 | | | | | | | | | | | |
| | | 20 | | 78 | 76 | 73 | 69 | 66 | 61 | 57 | 52 | 45 | 38 | 30 | 20 | | | | | | | | | | | | |
| | | 30 | 80 | 77 | 74 | 71 | 67 | 63 | 59 | 54 | 48 | 41 | 33 | 24 | | | | | | | | | | | | | |
| | | 40 | 78 | 75 | 72 | 69 | 65 | 61 | 56 | 51 | 44 | 37 | 28 | | | | | | | | | | | | | | |
| | | 50 | 76 | 73 | 70 | 67 | 63 | 58 | 53 | 47 | 40 | 32 | 23 | | | | | | | | | | | | | | |
| | | 60 | 75 | 72 | 68 | 64 | 60 | 55 | 50 | 43 | 36 | 27 | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 261 | 243 | 226 | 209 | 191 | 174 | 157 | 139 | 122 | 105 | 88 | 70 | 53 | 36 | | | | | | | | | | | |
| 55GS100 | 10 | 0 | | | 80 | 78 | 76 | 75 | 73 | 71 | 68 | 66 | 63 | 60 | 56 | 51 | 47 | 41 | 35 | 28 | | | | | | | |
| | | 20 | | 80 | 78 | 76 | 74 | 73 | 70 | 68 | 65 | 62 | 59 | 55 | 51 | 46 | 40 | 33 | 26 | | | | | | | | |
| | | 30 | | 79 | 77 | 75 | 73 | 71 | 69 | 67 | 64 | 61 | 57 | 53 | 48 | 42 | 36 | 29 | 22 | | | | | | | | |
| | | 40 | 79 | 78 | 76 | 74 | 72 | 70 | 68 | 65 | 62 | 59 | 55 | 50 | 45 | 39 | 32 | 25 | | | | | | | | | |
| | | 50 | 78 | 77 | 75 | 73 | 71 | 69 | 66 | 63 | 60 | 56 | 52 | 47 | 42 | 35 | 28 | 21 | | | | | | | | | |
| | | 60 | 77 | 76 | 74 | 72 | 70 | 67 | 65 | 61 | 58 | 54 | 49 | 44 | 38 | 31 | 24 | | | | | | | | | | |
| Shut-off PSI | | | 353 | 336 | 319 | 301 | 284 | 267 | 250 | 232 | 215 | 198 | 180 | 163 | 146 | 128 | 111 | 94 | 76 | 59 | | | | | | | |

Model 55GS

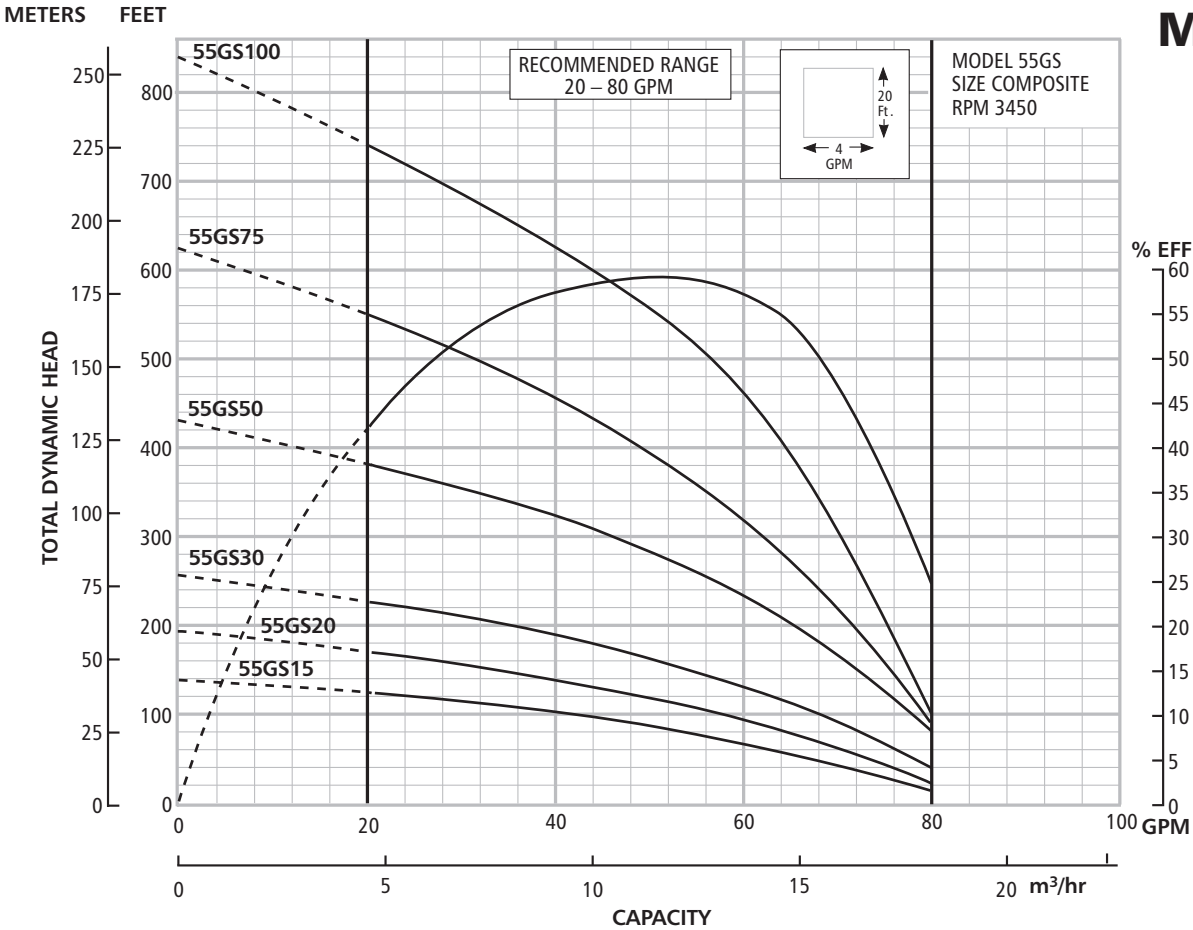

Model 60GS

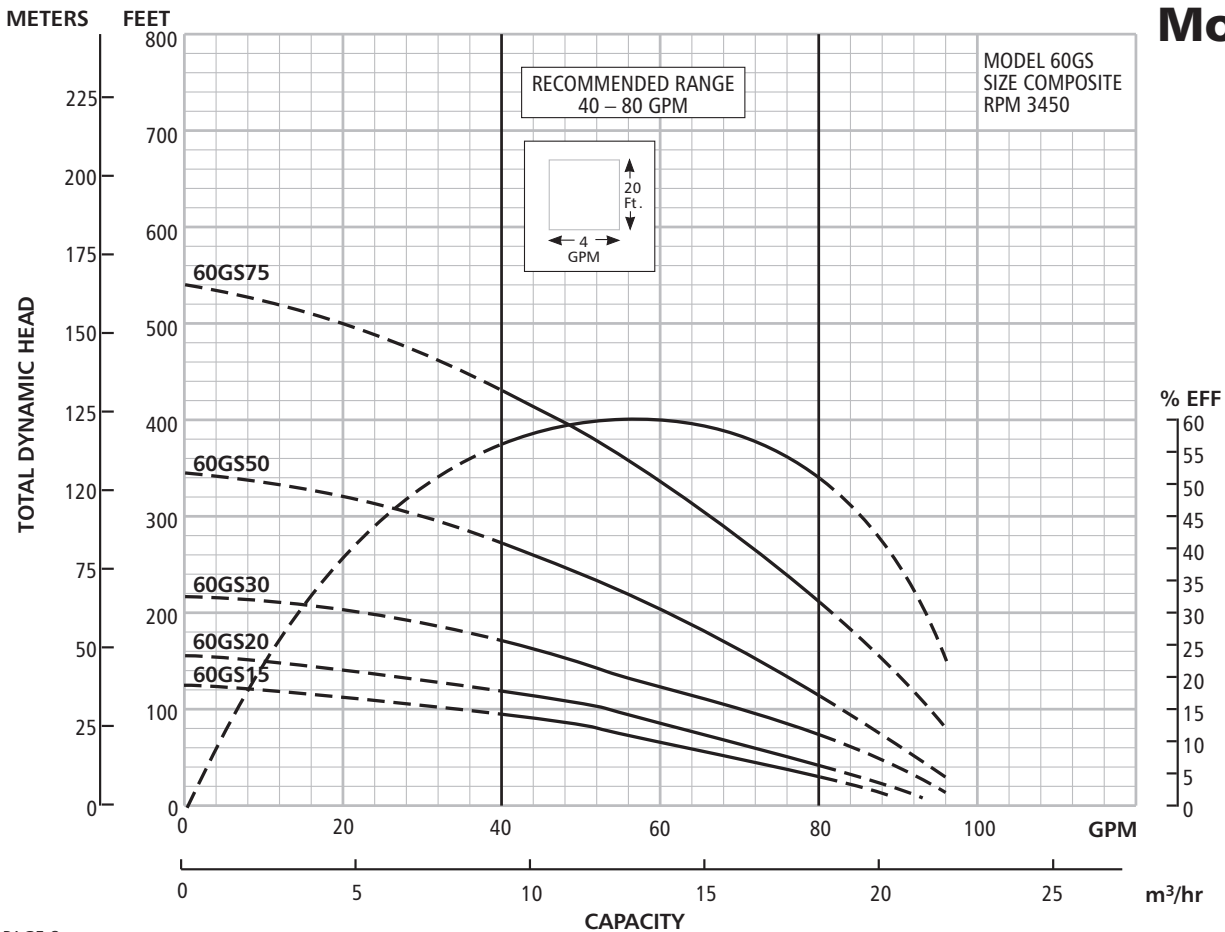

MODEL 60GS

SELECTION CHART

Horsepower Range 1½ – 7½, Recommended Range 40 – 80 GPM, 60 Hz, 3450 RPM

| Pump Model | HP | PSI | Depth to Water in Feet/Ratings in GPM (Gallons per Minute) | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------|----|-----|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|
| | | | 20 | 40 | 60 | 80 | 100 | 120 | 140 | 160 | 180 | 200 | 220 | 240 | 260 | 280 | 300 | 320 | 340 | 360 | 380 | 400 | 420 | 440 | 460 | 480 | | |
| 60GS15 | 1½ | 0 | | 75 | 64 | 51 | | | | | | | | | | | | | | | | | | | | | | |
| | | 20 | 60 | 47 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 30 | 44 | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 40 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 45 | 36 | 28 | 19 | | | | | | | | | | | | | | | | | | | | | | |
| 60GS20 | 2 | 0 | | | 73 | 63 | 52 | | | | | | | | | | | | | | | | | | | | | |
| | | 20 | 70 | 60 | 48 | | | | | | | | | | | | | | | | | | | | | | | |
| | | 30 | 58 | 46 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 40 | 44 | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 58 | 50 | 41 | 32 | 24 | 15 | 6 | | | | | | | | | | | | | | | | | | | |
| 60GS30 | 3 | 0 | | | | 77 | 70 | 62 | 54 | 45 | | | | | | | | | | | | | | | | | | |
| | | 20 | | 74 | 67 | 59 | 51 | 42 | | | | | | | | | | | | | | | | | | | | |
| | | 30 | 73 | 66 | 58 | 50 | 40 | | | | | | | | | | | | | | | | | | | | | |
| | | 40 | 65 | 57 | 48 | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50 | 56 | 47 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | 45 | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 86 | 77 | 68 | 60 | 51 | 42 | 34 | 25 | | | | | | | | | | | | | | | | | | |
| 60GS50 | 5 | 0 | | | | | | | 75 | 70 | 65 | 60 | 55 | 49 | 43 | | | | | | | | | | | | | |
| | | 20 | | | | | 73 | 69 | 64 | 59 | 53 | 47 | 41 | | | | | | | | | | | | | | | |
| | | 30 | | | | 73 | 68 | 63 | 58 | 52 | 47 | 40 | | | | | | | | | | | | | | | | |
| | | 40 | | 76 | 72 | 67 | 62 | 57 | 52 | 46 | 39 | | | | | | | | | | | | | | | | | |
| | | 50 | 76 | 71 | 66 | 62 | 56 | 51 | 45 | 38 | | | | | | | | | | | | | | | | | | |
| | | 60 | 70 | 66 | 61 | 55 | 50 | 44 | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 140 | 131 | 123 | 114 | 105 | 97 | 88 | 79 | 71 | 62 | 53 | 45 | 36 | | | | | | | | | | | | | |
| 60GS75 | 7½ | 0 | | | | | | | | | | 78 | 75 | 72 | 69 | 66 | 62 | 59 | 55 | 51 | 47 | 42 | | | | | | |
| | | 20 | | | | | | | | | 80 | 77 | 74 | 71 | 68 | 65 | 61 | 58 | 54 | 50 | 46 | 41 | | | | | | |
| | | 30 | | | | | | | | 80 | 77 | 74 | 71 | 68 | 64 | 61 | 57 | 53 | 49 | 45 | 40 | | | | | | | |
| | | 40 | | | | | | | 79 | 76 | 73 | 70 | 67 | 64 | 60 | 56 | 52 | 48 | 44 | 40 | | | | | | | | |
| | | 50 | | | | | 79 | 76 | 73 | 70 | 67 | 63 | 60 | 56 | 52 | 48 | 43 | | | | | | | | | | | |
| | | 60 | | | | 78 | 76 | 73 | 69 | 66 | 63 | 59 | 55 | 51 | 47 | 43 | | | | | | | | | | | | |
| Shut-off PSI | | | 224 | 215 | 207 | 198 | 189 | 181 | 172 | 163 | 155 | 146 | 137 | 129 | 120 | 111 | 103 | 94 | 85 | 77 | 68 | 59 | 51 | | | | | |

Residential Water Systems

MODEL 75GS

SELECTION CHART

Horsepower Range 3 – 10, Recommended Range 40 – 100 GPM, 60 Hz, 3450 RPM

| Pump Model | HP | PSI | Depth to Water in Feet/Ratings in GPM (Gallons per Minute) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------|----|-----|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|
| | | | 20 | 40 | 60 | 80 | 100 | 120 | 140 | 160 | 180 | 200 | 220 | 240 | 260 | 280 | 300 | 320 | 340 | 360 | 380 | 400 | 420 | 440 | 460 | 480 | 500 | 520 | | |
| 75GS30 | 3 | 0 | | | | | 80 | 67 | 52 | | | | | | | | | | | | | | | | | | | | | |
| | | 20 | | | 77 | 63 | 47 | | | | | | | | | | | | | | | | | | | | | | | |
| | | 30 | | 75 | 61 | 45 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 40 | 73 | 58 | 42 | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50 | 56 | 39 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | 37 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 77 | 69 | 60 | 51 | 43 | 34 | 25 | | | | | | | | | | | | | | | | | | | | | |
| 75GS50 | 5 | 0 | | | | | | 90 | 83 | 75 | 65 | 55 | 44 | | | | | | | | | | | | | | | | | |
| | | 20 | | | | | | 80 | 72 | 62 | 51 | 41 | | | | | | | | | | | | | | | | | | |
| | | 30 | | | | | | 79 | 70 | 60 | 50 | | | | | | | | | | | | | | | | | | | |
| | | 40 | | | | | 78 | 69 | 59 | 48 | | | | | | | | | | | | | | | | | | | | |
| | | 50 | | | 77 | 67 | 57 | 47 | | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | | 75 | 66 | 55 | 45 | | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 120 | 111 | 102 | 94 | 85 | 76 | 68 | 59 | 50 | 42 | 33 | | | | | | | | | | | | | | | | | |
| 75GS75 | 7½ | 0 | | | | | | | | | | | | 80 | 75 | 68 | 61 | 54 | 47 | 40 | | | | | | | | | | |
| | | 20 | | | | | | | | | | | | 79 | 73 | 66 | 59 | 52 | 45 | | | | | | | | | | | |
| | | 30 | | | | | | | | | | | | 78 | 72 | 65 | 58 | 51 | 44 | | | | | | | | | | | |
| | | 40 | | | | | | | | | | | | 77 | 71 | 64 | 57 | 50 | 43 | | | | | | | | | | | |
| | | 50 | | | | | | | | 76 | 70 | 63 | 56 | 49 | 42 | | | | | | | | | | | | | | | |
| | | 60 | | | | | | | 75 | 69 | 62 | 55 | 48 | 41 | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | | | | | 146 | 137 | 129 | 120 | 111 | 103 | 94 | 85 | 77 | 68 | 59 | 51 | 42 | | | | | | | | | | | |
| 75GS100 | 10 | 0 | | | | | | | | | | | 100 | 97 | 95 | 92 | 88 | 85 | 81 | 76 | 72 | 67 | 62 | 56 | 51 | 45 | 40 | | | |
| | | 20 | | | | | | | | | | | 99 | 96 | 94 | 91 | 87 | 84 | 79 | 75 | 70 | 65 | 60 | 55 | 49 | 44 | | | | |
| | | 30 | | | | | | | | | | 99 | 96 | 94 | 91 | 87 | 83 | 79 | 74 | 69 | 64 | 59 | 54 | 48 | 43 | | | | | |
| | | 40 | | | | | | | | | | 98 | 95 | 92 | 89 | 86 | 82 | 77 | 73 | 68 | 63 | 57 | 52 | 47 | 41 | | | | | |
| | | 50 | | | | | | | | 98 | 95 | 92 | 89 | 86 | 82 | 77 | 73 | 68 | 63 | 57 | 52 | 47 | 41 | | | | | | | |
| | | 60 | | | | | | 100 | 97 | 95 | 92 | 89 | 85 | 81 | 77 | 72 | 67 | 62 | 57 | 51 | 46 | 40 | | | | | | | | |
| Shut-off PSI | | | 272 | 263 | 254 | 246 | 237 | 228 | 220 | 211 | 202 | 194 | 185 | 176 | 168 | 159 | 150 | 142 | 133 | 124 | 116 | 107 | 98 | 90 | 81 | 72 | 64 | 55 | | |


MODEL 80GS

SELECTION CHART


Horsepower Range 3 – 7½, Recommended Range 50 – 120 GPM, 60 Hz, 3450 RPM

| Pump Model | HP | PSI | Depth to Water in Feet/Ratings in GPM (Gallons per Minute) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------|----|-----|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|
| | | | 20 | 40 | 60 | 80 | 100 | 120 | 140 | 160 | 180 | 200 | 220 | 240 | 260 | 280 | 300 | 320 | 340 | 360 | 380 | 400 | 420 | 440 | 460 | 480 | | | | |
| 80GS30 | 3 | 0 | | 114 | 100 | 82 | 63 | | | | | | | | | | | | | | | | | | | | | | | |
| | | 20 | 94 | 77 | 57 | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 30 | 74 | 53 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 40 | 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 55 | 46 | 38 | 29 | 20 | | | | | | | | | | | | | | | | | | | | | | | |
| 80GS50 | 5 | 0 | | | | 115 | 106 | 98 | 89 | 79 | 68 | 55 | | | | | | | | | | | | | | | | | | |
| | | 20 | 120 | 112 | 104 | 95 | 86 | 75 | 64 | 51 | | | | | | | | | | | | | | | | | | | | |
| | | 30 | 111 | 102 | 94 | 84 | 74 | 62 | | | | | | | | | | | | | | | | | | | | | | |
| | | 40 | 101 | 92 | 83 | 72 | 60 | | | | | | | | | | | | | | | | | | | | | | | |
| | | 50 | 91 | 81 | 70 | 58 | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 60 | 79 | 69 | 56 | | | | | | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 107 | 98 | 90 | 81 | 72 | 64 | 55 | 46 | 38 | 29 | | | | | | | | | | | | | | | | | | |
| 80GS75 | 7½ | 0 | | | | | | 118 | 113 | 107 | 101 | 95 | 89 | 82 | 75 | 68 | 60 | | | | | | | | | | | | | |
| | | 20 | | | | 122 | 117 | 111 | 105 | 100 | 93 | 87 | 80 | 73 | 66 | | | | | | | | | | | | | | | |
| | | 30 | | | 121 | 116 | 110 | 105 | 99 | 92 | 86 | 79 | 72 | 65 | | | | | | | | | | | | | | | | |
| | | 40 | 120 | 115 | 109 | 104 | 98 | 91 | 85 | 78 | 71 | 63 | | | | | | | | | | | | | | | | | | |
| | | 50 | 114 | 109 | 103 | 97 | 90 | 84 | 77 | 70 | 62 | | | | | | | | | | | | | | | | | | | |
| | | 60 | 108 | 102 | 96 | 89 | 83 | 76 | 69 | 61 | | | | | | | | | | | | | | | | | | | | |
| Shut-off PSI | | | 171 | 162 | 153 | 145 | 136 | 127 | 119 | 110 | 101 | 93 | 84 | 75 | 67 | 58 | 49 | | | | | | | | | | | | | |

Model 75GS

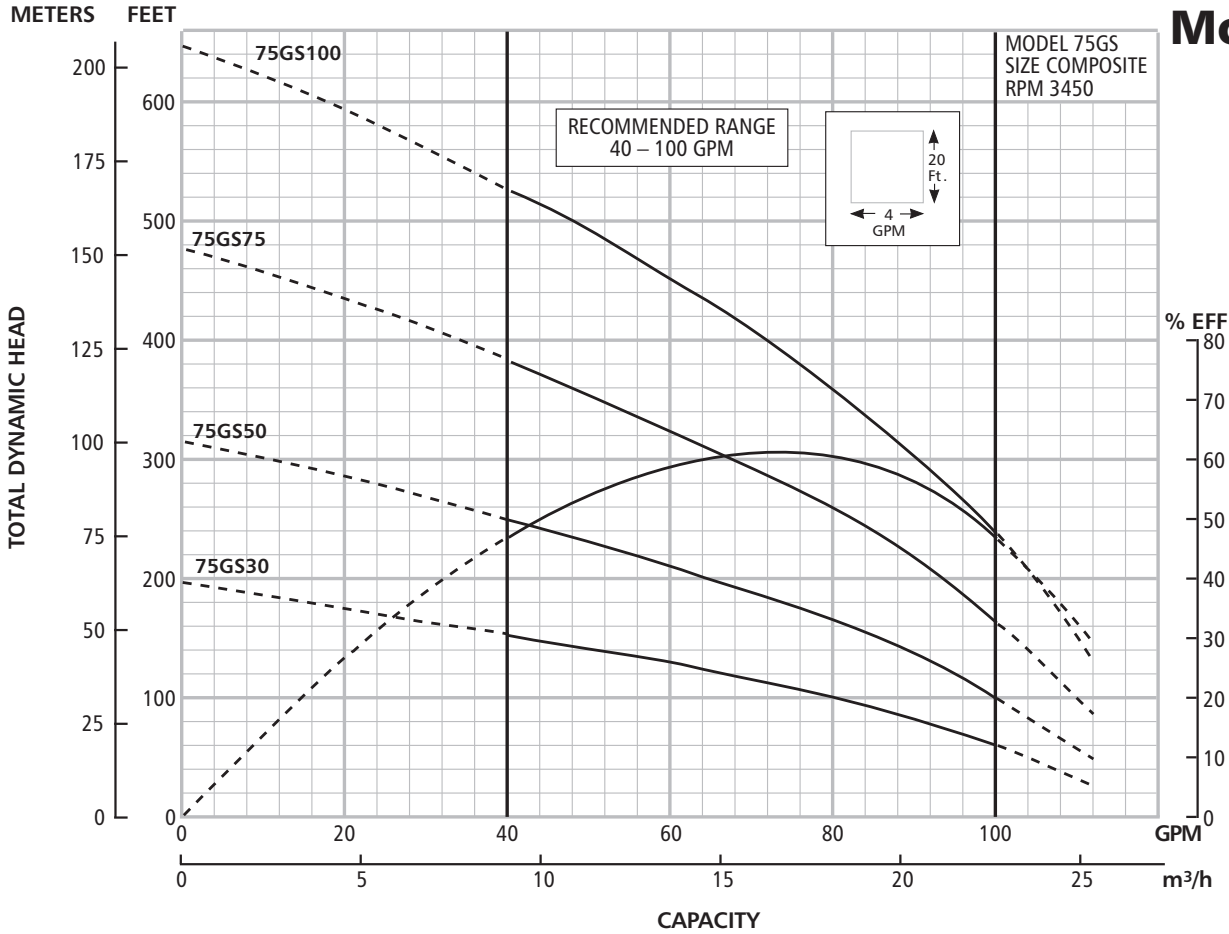

Model 80GS

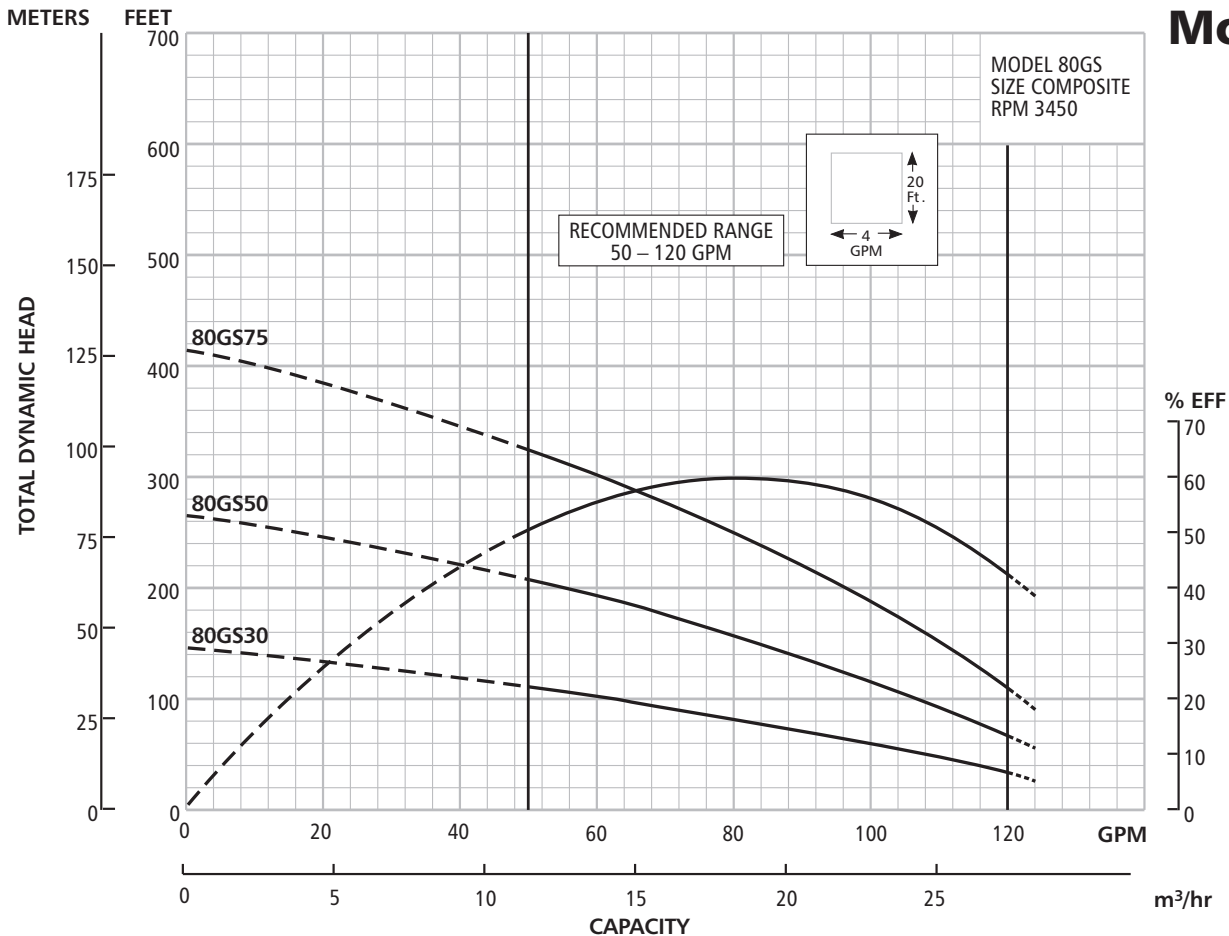

Xylem |'zīləm|

- 1) The tissue in plants that brings water upward from the roots;
- 2) a leading global water technology company.

We're 12,500 people unified in a common purpose: creating innovative solutions to meet our world's water needs. Developing new technologies that will improve the way water is used, conserved, and re-used in the future is central to our work. We move, treat, analyze, and return water to the environment, and we help people use water efficiently, in their homes, buildings, factories and farms. In more than 150 countries, we have strong, long-standing relationships with customers who know us for our powerful combination of leading product brands and applications expertise, backed by a legacy of innovation.

For more information on how Xylem can help you, go to www.xyleminc.com



Xylem, Inc.
2881 East Bayard Street Ext., Suite A
Seneca Falls, NY 13148
Phone: (866) 325-4210
Fax: (888) 322-5877
www.xyleminc.com/brands/gouldswatertechnology

Goulds is a registered trademark of Goulds Pumps, Inc. and is used under license.
CentriPro is a trademark of Xylem Inc. or one of its subsidiaries.
Noryl and Lexan are trademarks of GE Plastic.
© 2012 Xylem Inc. B33-80GS March 2012